

ARMY RESEARCH LABORATORY




# Ignitability of Wood From Fragment Attack

by L. J. Vande Kieft  
and W. W. Hillstrom

ARL-MR-381

December 1997

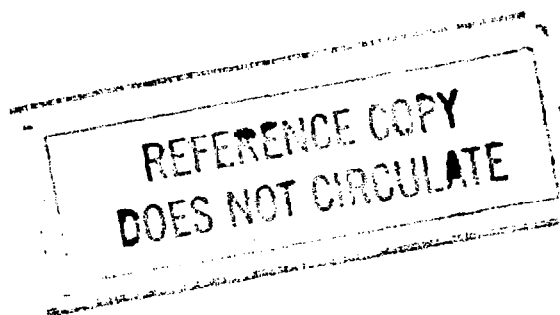

Approved for public release; distribution is unlimited.

**The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.**

**Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.**

**Destroy this report when it is no longer needed. Do not return it to the originator.**

# **Army Research Laboratory**

Aberdeen Proving Ground, MD 21005-5066

---

**ARL-MR-381****December 1997**

---

## **Ignitability of Wood From Fragment Attack**

**L. J. Vande Kieft**

Faith Farm

**W. W. Hillstrom**

Weapons and Materials Research Directorate, ARL

---

## **Abstract**

---

The U.S. Army Research Laboratory (ARL) has been funded by the Department of Defense Ammunition Logistics Agency (AMMOLOG) to develop technology for minimizing the effect of fires or hostile attacks on ammunition holding areas during combat operations. Historically, there are many examples of catastrophic fires and explosions in ammunition holding areas, including a recent example in Kuwait after Operation Desert Storm. These events normally involve a sequence of fires and explosions where each explosion spreads the fire to adjacent stacks, which then burn, explode, and propagate the reaction still further. Sometimes an entire stack will detonate, and sympathetic detonation of adjacent stacks may also occur. AMMOLOG would like to develop inexpensive and easy methods for minimizing these events. The concept is to use simple barriers, easily made from materials available on site, that will interrupt sympathetic detonation and stop low-trajectory fragments, and to use fire-resistant blankets to protect adjacent stacks from firebrands and small, high-trajectory fragments.

Much ammunition is packaged in wood crates and boxes, and stacked on wood pallets to facilitate handling and transportation. Fragments from exploding munitions can impact these materials and heat them to their ignition temperature, causing them to burn. If this happens, the munitions in or on them can be heated to their reaction point and, thus, further propagation. This report discusses the temperature of fragments from exploding ordnance.

## **Acknowledgments**

Archibald Tewarson and Ron Alpert of Factory Mutual Research Corporation, and André Fournier, Aberdeen Proving Ground Fire Protection Specialist, provided interesting and informative discussions on flammability and time-to-ignition of combustible materials.

**INTENTIONALLY LEFT BLANK.**

# Table of Contents

	<u>Page</u>
<b>Acknowledgments</b> .....	iii
<b>1. Background</b> .....	1
<b>2. Ignition Temperature of Wood</b> .....	1
2.1 Kindling Temperature .....	2
2.2 Chemical Composition of Dry Woods .....	4
2.3 Temperatures of Explosively Driven Fragments .....	5
<b>3. Discussion</b> .....	8
<b>4. References</b> .....	11
<b>Distribution List</b> .....	13
<b>Report Documentation Page</b> .....	17

**INTENTIONALLY LEFT BLANK.**



# 1. Background

The U.S. Army Research Laboratory (ARL) has been funded by the Department of Defense Ammunition Logistics Agency (AMMOLOG) to develop technology for minimizing the effect of fires or hostile attacks on ammunition holding areas during combat operations. Historically, there are many examples of catastrophic fires and explosions in ammunition holding areas, including a recent example in Kuwait after Operation Desert Storm. These events normally involve a sequence of fires and explosions where each explosion spreads the fire to adjacent stacks, which then burn, explode, and propagate the reaction still further. Sometimes an entire stack will detonate, and sympathetic detonation of adjacent stacks may also occur. AMMOLOG would like to develop inexpensive and easy methods for minimizing these events. The concept is to use simple barriers, easily made from materials available on site, that will interrupt sympathetic detonation and stop low-trajectory fragments, and to use fire-resistant blankets to protect adjacent stacks from firebrands and small, high-trajectory fragments.

Much ammunition is packaged in wood crates and boxes, and stacked on wood pallets to facilitate handling and transportation. Fragments from exploding munitions can impact these materials and heat them to their ignition temperature, causing them to burn. If this happens, the munitions stacked on the pallets or within wooden boxes can be heated to the point where they react and thus propagate the event. Therefore, it was desired to learn more about the ignition of wood by fragments from exploding ordnance.

## 2. Ignition Temperature of Wood

Items that must be considered in developing the criterion for the fragment ignition of wood:

- Kindling temperature.
- Temperature of fragments as they impact wood (initial temperature and temperature change as they propagate through air).

1

---

$$TRP = \Delta T_{ig} (\kappa \rho c_p)^{1/2},$$

and  $\Delta T_{ig} = T_{ig} - T_a,$

$T_a$  = ambient temperature,

- Critical and applied heat flux with respect to the wood impacted by the fragments.
- Adjacency of heat sources or reflectors for wood to continue burning.
- Potential modification of response for fragment penetration or intimate contact (little air available).
- Physical parameters defining munitions. Some fragments will be from thick-walled munitions, and others from thin-walled munitions. This will make a big difference in the amount of energy required to tear them into fragments—that energy being deposited in the fragments—and also in the rate of cooling as they propagate through the air.

**2.1 Kindling Temperature.** The following information was reported in a conversation with André Fournier (1996).

(1) There are two tests used to measure the ignition temperature of materials: the room test, and the time tunnel test. These tests may not always yield the same ignition temperature, but are usually rather consistent.

(2) Both test protocols use the same type of sample, a 1.25-in × 1.25-in × 4-in block of wood. In the room test, the sample is placed into a closed container with a normal atmosphere, and it is slowly heated. A thermocouple, mounted on the sample, indicates a slowly rising temperature until combustion initiates, at which point the temperature increases rapidly. This transition temperature is noted as the ignition temperature. The ignition temperature of white pine by this test is 406° F (207° C).

(3) In the time tunnel test, the sample is passed through a 20-ft-long tube that is held at a fixed temperature. This passage requires 40 min. If ignition does not occur, the temperature is raised and the process repeated, most likely with a fresh sample, until ignition does occur. The temperature at which ignition first occurs is called the ignition temperature.

Thermal degradation of wood is defined as having four stages. For a certain unknown wood, they are (Beals 1986):

(1) <392° F (200° C): H<sub>2</sub>O vapor, CO<sub>2</sub>, and formic and acetic acids are evolved—all noncombustible gases.

(2) 392° F (200° C) to 536° F (280° C): the endothermic phase; less water vapor, some carbon monoxide.

(3) 536° F (280° C) to 932° F (500° C): the exothermic phase; flammable vapors and particulates; some secondary reaction from charcoal formed.

(4) >932° F (500° C): charcoal burning; notable catalytic action.

Phase 1 is also endothermic, but is not labeled as such. For this particular sample, the exothermic phase begins well above 406° F (207° C), the ignition temperature of white pine, so the sample must not be white pine.

There is a 5% reduction in ignition temperature for piloted (ignition initiated by a small pilot flame) vs. nonpiloted initiation (Fournier 1996).

The time-to-ignition for flammable materials is given by the following equations (Tewarson 1997).

$$(1/t_{ig})^{1/2} = \frac{(4/\pi)^{1/2} (EHF - CHF)}{TRP},$$

where

$$TRP = \Delta T_{ig} (\kappa \rho c_p)^{1/2},$$

and  $\Delta T_{ig} = T_{ig} - T_a,$

$T_a$  = ambient temperature,

$\kappa$  = thermal conductivity of the material,

$\rho$  = density,

$c_p$  = specific heat at constant pressure,

CHF = Critical Heat Flux,

EHF = External Heat Flux, and

TRP = Thermal Response Parameter.

**2.2 Chemical Composition of Dry Woods.** Since the ignitability of wood depends upon its composition, Table 1 is excerpted from Beals (1986).

**Table 1. Chemical Composition of Dry Woods**

Species	Constituents				
	Carbon (wt-%)	Hydrogen (wt-%)	Oxygen (wt-%)	Nitrogen (wt-%)	Ash (wt-%)
Oak	50.16	6.02	43.26	0.09	0.37
Ash	49.18	6.27	43.19	0.07	0.57
Elm	48.99	6.20	44.25	0.06	0.50
Beech	49.06	6.11	44.17	0.09	0.57
Birch	48.88	6.06	44.67	0.10	0.29
Pine	50.31	6.20	43.08	0.04	0.37
Poplar	49.37	6.21	41.60	0.96	1.86
Calif. Redwood	53.50	5.90	40.30	0.10	0.20
Western Hemlock	50.40	5.80	41.40	0.10	2.20
Douglas Fir	52.30	6.30	40.50	0.10	0.80

The composition of these woods is very similar throughout the table, but their densities vary greatly. Likely their conductivities and specific heat capacities are also dissimilar, which implies dissimilar Thermal Response Parameters (TRP). However, most wood ammunition packing is made from pine, so the parameters for pine can safely be used for the calculation and discussion in this report.

**2.3 Temperatures of Explosively Driven Fragments.** Almost all the thermal energy deposited into a fragment will be from the fragmentation process, not from the detonation products that produce the kinetic energy. In order to calculate the temperature of a fragment at the time of release from its munition, the following steps must be considered.

A shell explodes, and the shell casing expands. The chemical reaction products do work on the shell casing. The reaction products are contained within the shell casing until its volume roughly trebles its original volume, depending upon the properties of the shell casing—in particular, the tensile strength at very high strain rates. For this discussion, assume  $V/V_0 = 3$  when comminution of the shell casing is complete.

The yield stress for a representative steel (1080) is  $\sigma_y = 125$  ksi, a figure that may be used to represent the yield stress for artillery shells. The strain is given by the stress-strain relationship, which can be derived from the  $V/V_0$  ratio at shell breakup that was assumed. Integrating this stress-strain product around the shell perimeter will yield the energy per unit volume deposited into the fragments. This is more understandable when one considers an infinitely long, hollow cylinder as representing a shell. The infinite length enables one to ignore end effects on a small-length element, of length  $L$ . Let the wall thickness be  $\tau$ . Initial values of the parameters are represented by the subscript "0," and final values by subscript "F." Thus, the volume

$$V_0 = \pi r_0^2 L,$$

where  $r$  is the radius of the cylinder. The circumference is

$$C_0 = 2 \pi r_0.$$

$$V_F = 3 V_0 = 3 \pi r_0^2 L = \pi r_F^2 L, \text{ and } r_F = \sqrt{3} r_0.$$

Thus, this annular ring of steel has stretched from length  $C_0$  to length  $C_F$  under a yield stress of  $\sigma_y$ . If  $r_0 \gg \tau$ , the energy,  $E$ , deposited under this process is given approximately by

$$E = \int_{C_0}^{C_F} \vec{F} \cdot d\vec{s}.$$

$\vec{F}$  is the hoop stress and so is parallel to  $d\vec{s}$ . Thus, the vector dot product,  $\vec{F} \cdot d\vec{s}$ , becomes the simple product,  $F ds$ .

$$F = \left( \frac{F}{A} \right) A = \sigma_Y A,$$

but

$$A = L \tau,$$

where  $\tau$  is the thickness of this cylinder, so

$$F = \sigma_Y L \tau \quad \text{and} \quad ds = dC.$$

Therefore,

$$E = \int_{C_0}^{C_F} \vec{F} \cdot d\vec{s} = \sigma_Y L \tau C \Big|_{C_0}^{C_F} = \sigma_Y L \tau (C_F - C_0),$$

$$C_F - C_0 = 2\pi r_F - 2\pi r_0 = 2\sqrt{3} \pi r_0 - 2\pi r_0 = 2\pi r_0 (\sqrt{3} - 1),$$

and

$$E = \sigma_Y L \tau 2\pi r_0 (\sqrt{3} - 1).$$

This energy from the fragmentation process goes into heating this length element, and can thus be expressed as,

$$E = m c_p (\Delta T),$$

where  $m$  = mass of the annular ring,

$c_p$  = specific heat, and

$\Delta T$  = change (increase) in temperature.

$$m = \rho_0 V_2 = \rho_0 2\pi r_0 \tau L,$$

where  $V_2$  = volume of the length element,  $L$ , of the shell casing.

Equating these two expressions for energy yields

$$\sigma_Y L \tau 2\pi r_0 (\sqrt{3} - 1) = \rho_0 2\pi r_0 \tau L c_p (\Delta T),$$

and

$$\Delta T = \frac{\sigma_Y (\sqrt{3} - 1)}{\rho_0 c_p}.$$

The yield stress for 1080 steel is ~125 ksi (*Horace T. Potts Steel Catalog and Reference Book* 1985); for very high strain rates, this at least doubles (Gregory 1997) to ~250 ksi. Converting to MKS units, this becomes,

$$\sigma_Y \approx 1.72 \cdot 10^9 \text{ N/m}^2.$$

Also,

$$\rho_0 = 7.88 \text{ g/cm}^3 = 7.88 \cdot 10^3 \text{ kg/m}^3$$

and

$$c_p = 0.107 \frac{\text{cal}}{\text{g} - ^\circ\text{C}} = 4.48 \cdot 10^2 \frac{\text{J}}{\text{kg} - ^\circ\text{C}}.$$

Therefore,

$$\Delta T = \frac{1.72 \cdot 10^9 (\sqrt{3} - 1)}{7.88 \cdot 10^3 \cdot 4.48 \cdot 10^2} = 357^\circ \text{ C}.$$

But  $T = T_0 + \Delta T$ , so for  $20^\circ \text{ C}$  ambient temperature,  $T = 377^\circ \text{ C}$  or  $711^\circ \text{ F}$ .

Additional thermal energy is derived from axial strain and shear, as well as from intimate contact with the very hot reaction products. However, the interval during which the reaction products can impart thermal energy to the fragments is so brief that the energy transfer can be neglected.

However, axial strain is not negligible. If one assumes locally isotropic strain (which is a reasonable assumption) within a shell casing as a detonation takes place, then the axial strain energy will be roughly equivalent to that from the circumferential strain. However, strain-to-failure was already assumed, so the present calculation accounts for axial as well as circumferential strain.

Additional heating occurs from plastic work upon impact, for both the fragment and the impacted material—in this case, wood. Also, as the fragment moves through the air, it is heated by air friction and cooled by conduction. These tend to offset each other, but not completely.

### 3. Discussion

With reference to the four stages of thermal degradation of wood (section 2.1), one can see that this calculated fragment temperature is more than adequate to bring most types of wood to the kindling point, especially white pine at 406° F. Wood is a poor thermal conductor while steel is a good thermal conductor, so the temperature of the wood at the fragment-wood interface would closely approximate that of the fragment; thus, with the presence of air, the wood would ignite.

After the explosion or detonation of a steel-encased explosive, one can find some of the resulting fragments. They display a wide range of colors, depending on their history after they were explosively launched. The fragments must impact a hard material for them to acquire the rich, deep purple to bright blue colors often found in fragments at high-explosive experimental facilities (Kineke 1996). Colors found on fragments after an explosive shot are indicative of the highest temperature achieved by the fragment during this event. Up to ~1,000° F, the colors are produced by the oxide layers formed on the surfaces of the fragments, and these colors persist even after cooling; beyond this temperature the colors are caused by black-body radiation, but do not remain once the fragment has cooled. Several references document the relationship between the highest temperature achieved and the resulting color of the fragment (Dixie Gun Works 1997; *Machinery's Handbook* 1992; Glover 1991). The relevant section of Dixie Gun Works (1997) is quoted here as Table 2.



**Table 2. List of Temperature Colors on Polished Steel**

Color	Temperature (°F)
Very Faint Yellow	430
Pale Straw Color	450
Golden Yellow	470
Brown	490
Brown With Purple Spots	510
Purple	530
Violet	540
Dark Blue	550
Bright Blue	565
Grey Blue	600
Black Red in Dull Light or Darkness	800
Very Black Red in Room Light	900
Blood Red	1,050
Dark Cherry Red	1,075
Medium Cherry Red	1,250
Bright Cherry Red	1,550
Salmon	1,650
Orange	1,725
Lemon	1,825
Light Yellow	1,975
White	2,200
Sparkling White	2,350

Since some of these fragments can strike wood in an ammunition stack, it is important to know the temperature of the fragments after they strike. If they have a sufficiently high temperature for a sufficiently long interval of time, they will ignite the wood. Fragments can acquire heat energy from their propinquity to the reaction products of the explosion that launched them, from the plastic work of tearing loose from the munition, from friction with the atmosphere, and from impact, in which they trade kinetic energy for thermal energy. These impacts can be both intermediate and final—i.e., the impact in which the fragment comes to rest. Fragments can also lose thermal and kinetic energy (KE) to the air during passage, and they can lose KE through inelastic collisions.

An important mechanism for cooling is conductivity from the fragment to the wood in which it is embedded. The rate at which the heat flows from the fragment into the wood is determined by the TRP, which is defined previously.

Once ignited, the wood may not continue to burn. It is almost impossible to have a sustained fire with only one piece of wood; two or three pieces in the immediate neighborhood are required so that the radiant energy of one piece can be reflected back onto itself, and this energy, combined with that arriving from the adjacent pieces, can then maintain its surface temperature above the kindling temperature. However, if a fragment has sufficient energy, it cannot only kindle the flame, but maintain it until adjacent wood surfaces have been ignited, and then these can provide the energy required to maintain combustion.

The bottom line is that fragments from exploding munitions will frequently possess sufficient energy, at a sufficiently high temperature, to ignite wood and support continued combustion. Blankets that protect ammunition from such fragments should be able to survive temperatures of at least 380° C.

## 4. References

- Beals, Harold O. *NFPA Handbook*. 16<sup>th</sup> edition, section 5, chapter 2, School of Forestry, Auburn University, AL, 1986.
- Dixie Gun Works. *Catalog No. 146*. Union City, TN, 1997.
- Fournier, André. Personal Communication. Directorate of Safety, Health and Environment, Fire and Emergency Services Division, Aberdeen Proving Ground, MD, 1996.
- Glover, Thomas J. (Compiler). *Pocket Reference*. Morrison, CO: Sequoia Publishing, Inc., 1991.
- Gregory, Frederick. Personal Communication. U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, 1997.
- Horace T. Potts *Steel Catalog and Reference Book*. 10<sup>th</sup> edition, Brookville, FL: J. H. Jackson and Associates, 1985.
- Kineke, John. Personal Communication. U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, 1996.
- Machinery's Handbook*. Industrial Press, Inc., 24<sup>th</sup> edition, p. 469, 1992.
- Tewarson, Archibald. *NFPA Handbook*. 18<sup>th</sup> edition, section 3, chapter 4, Factory Mutual Research Corporation, Melville, NY, 1997.

**INTENTIONALLY LEFT BLANK.**

NO. OF  
COPIES ORGANIZATION

2 DEFENSE TECHNICAL  
INFORMATION CENTER  
DTIC DDA  
8725 JOHN J KINGMAN RD  
STE 0944  
FT BELVOIR VA 22060-6218

1 HQDA  
DAMO FDQ  
DENNIS SCHMIDT  
400 ARMY PENTAGON  
WASHINGTON DC 20310-0460

1 CECOM  
SP & TRRSTRL COMMCTN DIV  
AMSEL RD ST MC M  
H SOICHER  
FT MONMOUTH NJ 07703-5203

1 PRIN DPTY FOR TCHNLGY HQ  
US ARMY MATCOM  
AMCDCG T  
M FISETTE  
5001 EISENHOWER AVE  
ALEXANDRIA VA 22333-0001

1 PRIN DPTY FOR ACQUSTN HQS  
US ARMY MATCOM  
AMCDCG A  
D ADAMS  
5001 EISENHOWER AVE  
ALEXANDRIA VA 22333-0001

1 DPTY CG FOR RDE HQS  
US ARMY MATCOM  
AMCRD  
BG BEAUCHAMP  
5001 EISENHOWER AVE  
ALEXANDRIA VA 22333-0001

1 DPTY ASSIST SCY FOR R&T  
SARD TT T KILLION  
THE PENTAGON  
WASHINGTON DC 20310-0103

1 OSD  
OUSD(A&T)/ODDDR&E(R)  
J LUPO  
THE PENTAGON  
WASHINGTON DC 20301-7100

NO. OF  
COPIES ORGANIZATION

1 INST FOR ADVNCD TCHNLGY  
THE UNIV OF TEXAS AT AUSTIN  
PO BOX 202797  
AUSTIN TX 78720-2797

1 USAASA  
MOAS AI W PARRON  
9325 GUNSTON RD STE N319  
FT BELVOIR VA 22060-5582

1 CECOM  
PM GPS COL S YOUNG  
FT MONMOUTH NJ 07703

1 GPS JOINT PROG OFC DIR  
COL J CLAY  
2435 VELA WAY STE 1613  
LOS ANGELES AFB CA 90245-5500

1 ELECTRONIC SYS DIV DIR  
CECOM RDEC  
J NIEMELA  
FT MONMOUTH NJ 07703

3 DARPA  
L STOTTS  
J PENNELLA  
B KASPAR  
3701 N FAIRFAX DR  
ARLINGTON VA 22203-1714

1 USAF SMC/CED  
DMA/JPO  
M ISON  
2435 VELA WAY STE 1613  
LOS ANGELES AFB CA  
90245-5500

1 US MILITARY ACADEMY  
MATH SCI CTR OF EXCELLENCE  
DEPT OF MATHEMATICAL SCI  
MDN A MAJ DON ENGEN  
THAYER HALL  
WEST POINT NY 10996-1786

1 DIRECTOR  
US ARMY RESEARCH LAB  
AMSRL CS AL TP  
2800 POWDER MILL RD  
ADELPHI MD 20783-1145

**NO. OF  
COPIES ORGANIZATION**

1    **DIRECTOR  
US ARMY RESEARCH LAB  
AMSRL CS AL TA  
2800 POWDER MILL RD  
ADELPHI MD 20783-1145**

3    **DIRECTOR  
US ARMY RESEARCH LAB  
AMSRL CI LL  
2800 POWDER MILL RD  
ADELPHI MD 20783-1145**

**ABERDEEN PROVING GROUND**

4    **DIR USARL  
AMSRL CI LP (305)**

NO. OF  
COPIES ORGANIZATION

1 COMMANDER  
INDIAN HEAD DIVISION  
NSWC  
CODE 950T M SWISDAK  
101 STRAUSS AVENUE  
INDIAN HEAD MD 20640-5035

1 COMMANDING OFFICER  
NFESC  
JIM TANCRETO ESC62  
1100 23RD AVE BLDG 1100  
PORT HUENEME CA 93043-4370

1 CHAIRMAN  
DOD EXPLOSIVES SFTY BRD  
DR. J. WARD  
ROOM 856 C HOFFMAN BLDG I  
2461 EISENHOWER AVENUE  
ALEXANDRIA VA 22331-0600

1 DEFENSE AMMOLOG ACTIVITY  
AMSTA AR AL  
D SCARBOROUGH  
PICATINNY ARSENAL NJ  
07806-5000

1 US ARMY SOLDIER SYS CMD  
SSCNS WSO DAVE LEMOINE  
KANSAS STREET  
NATICK MA 01760-5018

2 USAE WATERWAYS EXPRMNT STN  
CEWES SD R P KINNEBREW  
CEWES SD R DR. BEN CARNES  
3909 HALLS FERRY ROAD  
VICKSBURG MS 39180-6199

1 DEFENSE AMMUNITION  
LOGISTICS AGENCY  
AMSTA AR AL D SCARBOROUGH  
PICATINNY ARSENAL NJ  
07806-5000

1 US ARMY ENGR WATERWAYS  
EXPERIMENT STATION  
CEWES SS E J WEATHERSBY  
3909 HALLS FERRY RD  
VICKSBURG MS 39180

NO. OF  
COPIES ORGANIZATION

ABERDEEN PROVING GROUND

16 DIR USARL  
AMSRL WM MA  
R SHUFORD  
J KIDD  
W CHIN  
T MULKERN  
C PERGANTIS  
W CHIN  
AMSRL WM TB  
B FREY  
V BOYLE  
W HILLSTROM  
L VANDE KIEFT  
R LOTTERO  
P BAKER  
R LOTTERO  
R FREY  
J STARKENBERG  
W LAWRENCE

INTENTIONALLY LEFT BLANK.



REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
<small>Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.</small>				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE December 1997		3. REPORT TYPE AND DATES COVERED Final, Jan - Apr 97
4. TITLE AND SUBTITLE  Ignitability of Wood From Fragment Attack			5. FUNDING NUMBERS  1L162618AH80	
6. AUTHOR(S)  L. J. Vande Kieft and W. W. Hillstrom				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  U.S. Army Research Laboratory ATTN: AMSRL-WM-TB Aberdeen Proving Ground, MD 21005-5066			8. PERFORMING ORGANIZATION REPORT NUMBER  ARL-MR-381	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT  Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) <p>The U.S. Army Research Laboratory (ARL) has been funded by the Department of Defense Ammunition Logistics Agency (AMMOLOG) to develop technology for minimizing the effect of fires or hostile attacks on ammunition holding areas during combat operations. Historically, there are many examples of catastrophic fires and explosions in ammunition holding areas, including a recent example in Kuwait after Operation Desert Storm. These events normally involve a sequence of fires and explosions where each explosion spreads the fire to adjacent stacks, which then burn, explode, and propagate the reaction still further. Sometimes an entire stack will detonate, and sympathetic detonation of adjacent stacks may also occur. AMMOLOG would like to develop inexpensive and easy methods for minimizing these events. The concept is to use simple barriers, easily made from materials available on site, that will interrupt sympathetic detonation and stop low-trajectory fragments, and to use fire-resistant blankets to protect adjacent stacks from firebrands and small, high-trajectory fragments.</p> <p>Much ammunition is packaged in wood crates and boxes, and stacked on wood pallets to facilitate handling and transportation. Fragments from exploding munitions can impact these materials and heat them to their ignition temperature, causing them to burn. If this happens, the munitions in or on them can be heated to their reaction point and, thus, further propagation. This report discusses the temperature of fragments from exploding ordnance.</p>				
14. SUBJECT TERMS  fragments, detonation, flammability, wood			15. NUMBER OF PAGES 19	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

**INTENTIONALLY LEFT BLANK.**

## USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. ARL Report Number/Author ARL-MR-381 (Vande Kieft) Date of Report December 1997

2. Date Report Received \_\_\_\_\_

3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

CURRENT  
ADDRESS

\_\_\_\_\_  
Organization

\_\_\_\_\_  
Name

\_\_\_\_\_  
E-mail Name

\_\_\_\_\_  
Street or P.O. Box No.

\_\_\_\_\_  
City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

OLD  
ADDRESS

\_\_\_\_\_  
Organization

\_\_\_\_\_  
Name

\_\_\_\_\_  
Street or P.O. Box No.

\_\_\_\_\_  
City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)  
(DO NOT STAPLE)

---

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO 0001,APG,MD

POSTAGE WILL BE PAID BY ADDRESSEE

DIRECTOR  
US ARMY RESEARCH LABORATORY  
ATTN AMSRL WM TB  
ABERDEEN PROVING GROUND MD 21005-5066



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

